

PRO SD PN AtEx 2-22 AtEx 1-21



TANGENTIAL INLET FOR BETTER DUST SEPARATION FROM THE FILTER

CONTAINER, FILTER CHAMBER AND TOP COVER MADE IN AISI 304 STAINLESS STEEL IN ACCORDANCE TO ATEX STANDARD

STORAGE CONTAINER

TANK QUICK RELEASE FOR FAST DISPOSAL



VENTURI

SEMI-AUTOMATIC FILTER CLEANING SYSTEM WITH A PNEU-MECHANICAL PISTON THAT MOVING UP & DOWN CREATE VIBRATIONS ABLE TO MAKE AN EFFECTIVE AND FAST CLEANING.


SECONDARY HEPA FILTER (OPTIONAL)

M CLASS CONDUCTIVE ALUMINIZED PRIMARY CARTRIDGE FILTER

CYCLONE FOR INCREASED FILTER EFFICIENCY

Industrial vacuums powered by compressed air from the upper filter characteristics ideal for all applications where there are large amounts of dust to be removed in any industrial environment or production process, reducing the time devoted to cleaning and taking advantage of environments totally dedusted.

WORK EFFICIENCY

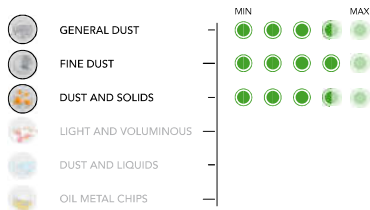

USEFUL RATING FOR THE COMPARISON WITH OTHER MODELS FROM OUR RANGE

TYPE OF APPLICATION

DUST

TECHNICAL DATAS

| | PRO SD PN <small>AtEx 2-22</small> | PRO SD PN <small>AtEx 1-21</small> |
|---------------------|------------------------------------|--|
| SUCTION UNIT | VENTURI | UNITÀ DI ASPIRAZIONE VENTURI |
| SUPPLY PRESSURE | 8-10 Bar | PRESSIONE DI ALIMENTAZIONE 8-10 Bar |
| AIR CONSUMPTION | 1500 l/min | CONSUMO DI ARIA 1500 l/min |
| FILTER SHAKER | SEMI - AUTO | SCUOTIFILTRO SEMI - AUTO |
| FILTER CLASS | 22000 Cm ² | SUPERFICIE FILTRANTE 22000 Cm ² |
| STANDARD FILTRATION | M | FILTRAZIONE STANDARD M |
| FILTRATION OPTIONAL | M + HEPA | FILTRAZIONE OPZIONALE M + HEPA |
| AIR FLOW | 380 m ³ /h | PORTATA D'ARIA 380 m ³ /h |
| MAX DEPRESSION | 280 mBar | DEPRESSIONE MAX 280 mBar |
| VACUUM VALVE | 380 mBar | DEPRESSIONE VALVOLA 380 mBar |
| CAPACITY | 75 L | CAPENZA 75 L |
| DIMENSIONS | 80X60 h 155 cm | DIMENSIONI 80X60 h 155 cm |
| WEIGHT | 72 Kg | PESO 72 Kg |

DEGREE OF SPECIFICITY



PRO D 11 PN AtEx 2-22 AtEx 1-21



EXTREMELY STURDY TELESCOPIC CONTAINER LIFTING SYSTEM

REINFORCED FRAME

STORAGE CONTAINER

TANGENTIAL INLET FOR BETTER DUST SEPARATION FROM THE FILTER

CONTAINER, FILTER CHAMBER AND TOP COVER MADE IN AISI 304 STAINLESS STEEL IN ACCORDANCE TO ATEX STANDARD



VENTURI

SEMI-AUTOMATIC FILTER CLEANING SYSTEM WITH A PNEU-MECHANICAL PISTON THAT MOVING UP & DOWN CREATE VIBRATIONS ABLE TO MAKE AN EFFECTIVE AND FAST CLEANING.


SECONDARY HEPA FILTER (OPTIONAL)

M CLASS CONDUCTIVE ALUMINIZED PRIMARY CARTRIDGE FILTER

CYCLONE FOR INCREASED FILTER EFFICIENCY

Industrial vacuums powered by compressed air suitable for cleaning dust or solid in the industry as characterized by a building designed to meet the needs of solidity and strength. The lifting system is designed to vacuum and filling the containers with heavy material in order to ensure a good reliability in time.

WORK EFFICIENCY

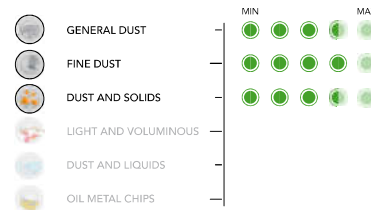

USEFUL RATING FOR THE COMPARISON WITH OTHER MODELS FROM OUR RANGE

TYPE OF APPLICATION

DUST

DEGREE OF SPECIFICITY



TECHNICAL DATAS

| | PRO D 11 PN <small>AtEx 2-22</small> | PRO D 11 PN <small>AtEx 1-21</small> |
|---------------------|--------------------------------------|--|
| SUCTION UNIT | VENTURI | UNITÀ DI ASPIRAZIONE VENTURI |
| SUPPLY PRESSURE | 8-10 Bar | PRESSIONE DI ALIMENTAZIONE 8-10 Bar |
| AIR CONSUMPTION | 1500 l/min | CONSUMO DI ARIA 1500 l/min |
| FILTER SHAKER | SEMI - AUTO | SCUOTIFILTRO SEMI - AUTO |
| FILTER CLASS | 22000 Cm ² | SUPERFICIE FILTRANTE 22000 Cm ² |
| STANDARD FILTRATION | M | FILTRAZIONE STANDARD M |
| FILTRATION OPTIONAL | M + HEPA | FILTRAZIONE OPZIONALE M + HEPA |
| AIR FLOW | 380 m ³ /h | PORTATA D'ARIA 380 m ³ /h |
| MAX DEPRESSION | 280 mBar | DEPRESSIONE MAX 280 mBar |
| VACUUM VALVE | 380 mBar | DEPRESSIONE VALVOLA 380 mBar |
| CAPACITY | 75 L | CAPENZA 75 L |
| DIMENSIONS | 80X60 h 150 cm | DIMENSIONI 80X60 h 150 cm |
| WEIGHT | 115 Kg | PESO 115 Kg |

DEGREE OF SPECIFICITY